


Body	Model Specifications
MOC of Frame	MS Powder coated/ SS 304/316/316 L
MOC of Drive Pulley	MS Powder coated/ SS 304/316/316 L
MOC of Driven Pulley	Aluminium with Ceramic/ Teflon Fingers
MOC of Guide & Pinch Roller	PP/PVC
MOC of Wiper	Teflon(PTFE)

Source Drive	3 Phase, AC Motor
Drive Power	½ HP / 1 HP


Oil Transfer Tube

MOC of Tube	Oleophilic Polymer
Size of Tube	18 mm dia x 2 mtr length (upto 25 mm) (upto 15 mtr)
Temperature of Operation	Ambient to 60 °C
Oil Removal Rate	Upto 200 LPH


Stationary Type Model 1

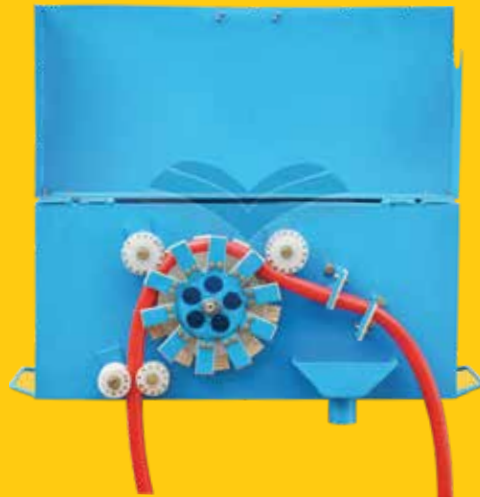

Stationary Type Model 2

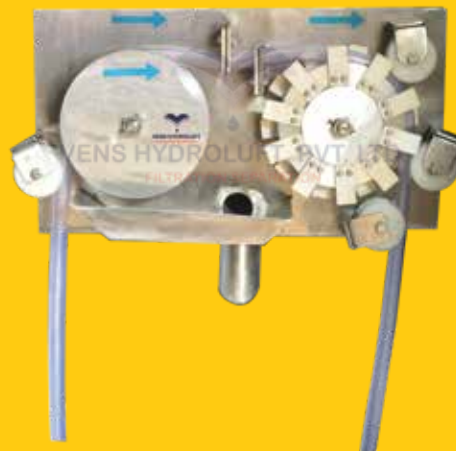

Cantilever Type Model 3

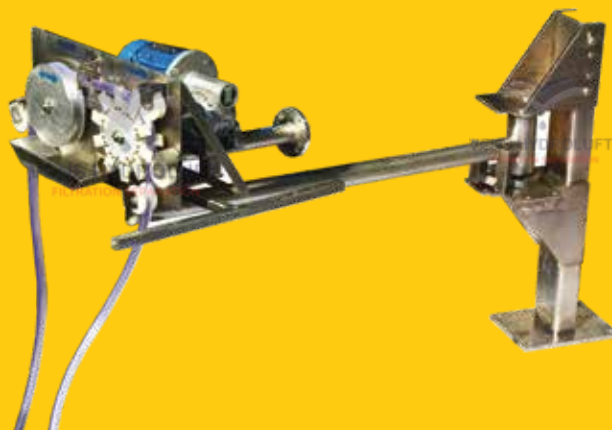

**Magnetic
separators**

**Belt
Oil Skimmers**

**Tube
Oil Skimmers**

**Wika
PressureGauge**

**Disk
Oil Skimmers**

**Mini Vacuum
Systems**

**Floating
Funnel
Skimmers**

**Oil
Spill Response
Equipment**

**Floating
Drum Skimmers**

**Chain
Oil Skimmers**

**Floating
Disk Skimmers**

**Filter
Elements**

**Slotted Tube
Oil Skimmers**



**Simplex &
Duplex housing filters**

**Coalescer
Oil Water Separators**

**Grooved
Disk type Skimmers**

**Truck Mounted
Vacuum Systems**

**Mini
Oil Skimmers**

**Compact
Oil Skimmers**



**Buy
Tube Skimmer Here**